


CERTIFICATE

Certified Passive House Component

Component-ID 0872wi04 valid until 31st December 2019

Passive House Institute
Dr. Wolfgang Feist
64283 Darmstadt
Germany

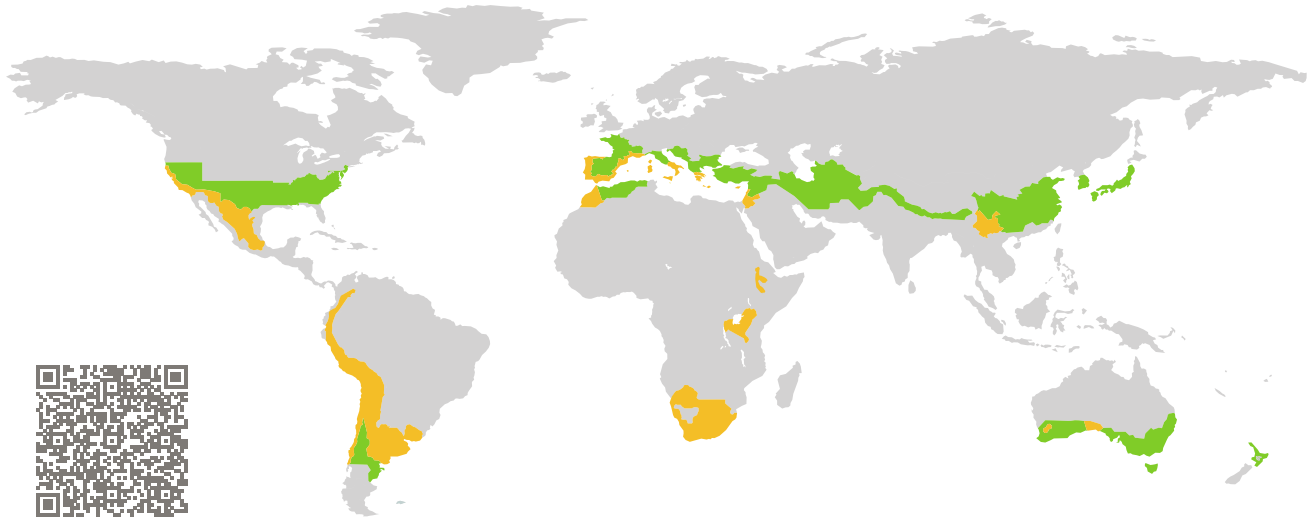


Category: **Window Frame**
Manufacturer: **Carpinteria Llodiana S.A.,
Llodio,
Spain**
Product name: **VENTACLIM SUPER-CONFORT**

**This certificate was awarded based on the following
criteria for the warm, temperate climate zone**

Comfort $U_W = 1.00 \leq 1.00 \text{ W}/(\text{m}^2 \text{ K})$
 $U_{W,\text{installed}} \leq 1.05 \text{ W}/(\text{m}^2 \text{ K})$
with $U_g = 0.90 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene $f_{Rsi=0.25} \geq 0.65$

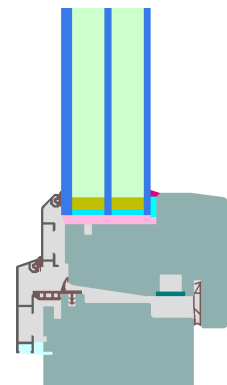

warm, temperate climate



**CERTIFIED
COMPONENT**

Passive House Institute

Passive House
efficiency class

phE


phD

phC

phB

phA

www.passivehouse.com

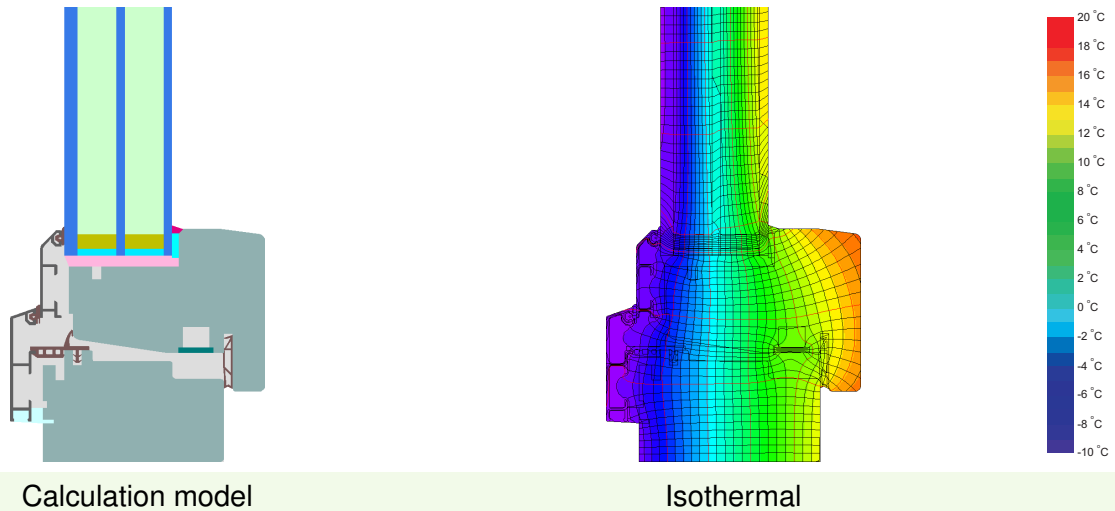

Calculation model Isothermal

Description

Timber frame (0,11 W/(mK)) with aluminum cladding. Pane thickness: 50 mm (4/18/4/18/6), rebate depth: 11 mm, spacer: Chromatech Ultra F with polyurethane as secondary seal.

Explanation





The window U-values were calculated for the test window size of 1.23 m × 1.48 m with $U_g = 0.90$ W/(m² K). If a higher quality glazing is used, the window U-values will improve as follows:

Glazing	$U_g =$	0.90	0.70	0.63	0.55	W/(m ² K)
		↓	↓	↓	↓	
Window	$U_W =$	1.00	0.86	0.81	0.75	W/(m ² K)




Transparent building components are classified into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge, and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.

Further information relating to certification can be found on www.passivehouse.com and passipedia.org.

Frame values			Frame width b_f mm	U -value frame U_f W/(m ² K)	Ψ -panel edge Ψ_g W/(m K)	Temp. Factor $f_{RSi=0.25}$ [-]
Top	(to)		108	0.98	0.029	0.66
Side	(s)		108	0.98	0.029	0.66
Bottom	(bo)		108	1.01	0.029	0.66
Mullion flying	(fm)		156	0.95	0.029	0.66
			Spacer: CHROMATECH ultra F		Secondary seal: Polyurethane	

Validated installations

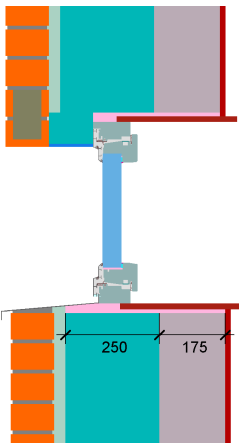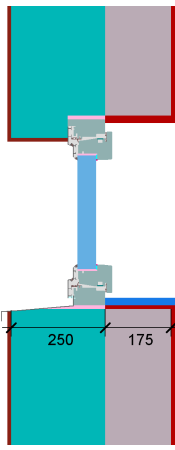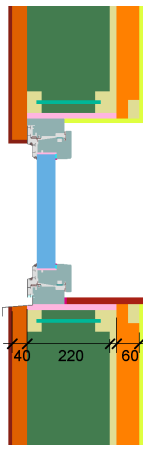Cavity wall (operable)		EIFS		Timber frame	
$U_{Wall} = 0.13 \text{ W/(m}^2 \text{ K)}$		$U_{Wall} = 0.13 \text{ W/(m}^2 \text{ K)}$		$U_{Wall} = 0.15 \text{ W/(m}^2 \text{ K)}$	
					
$\Psi_{install}$	W/(m K)	$\Psi_{install}$	W/(m K)	$\Psi_{install}$	W/(m K)
Top	0.009	Top	0.010	Top	0.016
Side	0.009	Side	0.010	Side	0.016
Bottom	0.018	Bottom	0.023	Bottom	0.022
$U_{W,installed} = 1.03 \text{ W/(m}^2 \text{ K)}$		$U_{W,installed} = 1.04 \text{ W/(m}^2 \text{ K)}$		$U_{W,installed} = 1.05 \text{ W/(m}^2 \text{ K)}$	